




**INSTRUCTION FOR
PART NUMBER 45-1231
GL1800 LED LIGHTED FRONT FENDER EAGLE**
Revised 10-15

Note: Read instruction thoroughly before installing. Drilling required.

1. Place bike on center stand.
2. Test light to ensure it is working properly.
3. Remove front fender. Fig 1 (consult your service manual)
4. Measure from the tip of the front fender towards the bike about 3 inches and mark with tape. Fig 1

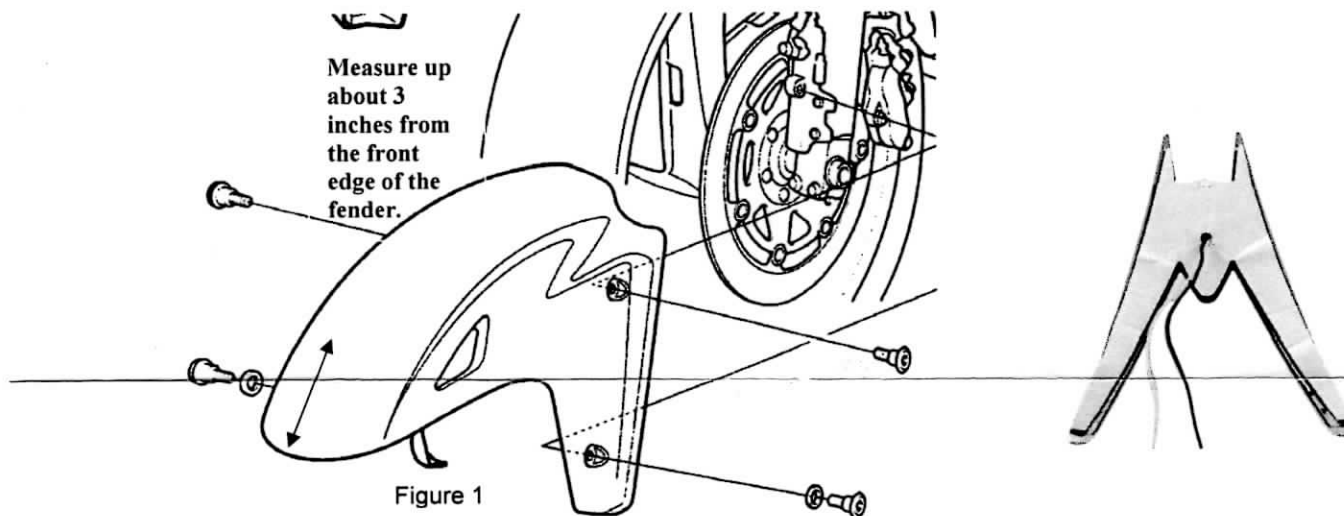

5. Center eagle on fender and mark fender for drill location under the eagle head. Be sure the placement is correct as you desire before drilling a hole.
6. Drill a 1/8" hole.
7. Clean area thoroughly and let dry.
8. Put the light wires through the hole and secure the wires to inside of fender so wires will not touch any moving parts.
9. Remove the tape covering from the light and press on firmly.
10. Replace fender. Attach the black wire to ground and yellow wire to a running light.
11. Do not ride bike for 24 hours so tape glue can cure for a secure fit.

