



SILHOUETTE FRONT SHIFT ARM ACCENT 1043

FITS: '82-UP DRESSERS, ROAD KINGS, ROAD GLIDE, STREET GLIDE WITH OR WITHOUT KURYAKYN FRONT INNER PRIMARY EXTENSION, P/N 8289 OR 8370

PARTS INCLUDED

- 1 Silhouette Accent Front Half
- 1 Silhouette Accent Rear Half
- 3 6-32 x 1/4 Button Socket Cap Screw (BSCS)
- 1 5/16 Flat Washer (Included for custom applications)
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

ATTENTION! It is the installer's responsibility to ensure all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

NOTE Installation is shown on a 2007 Road Glide; while representative of typical procedure, there may be minor differences when installed on other models.

TOOLS SUGGESTED

Set of hex wrenches, combination wrenches

PROCEDURE

STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.



STEP 2 Remove the front of the shift linkage from the shift lever and the rear of the linkage from the transmission lever. See PIC.1.

STEP 3 Assemble the front and back halves of the Silhouette Accent and secure them with the three 6-32 x 1/4 Button Socket Cap Screws (BSCS); fully tighten the screws.

STEP 4 Slide the cover assembly over the shifter lever; align the hole in the cover with the hole in the lever. See PIC.2.

STEP 5 Reinstall the front of the linkage and secure with the original nut. Install the included 5/16 washer between the Silhouette Accent and the shift linkage barrel joint if more clearance is necessary.

-cont.-

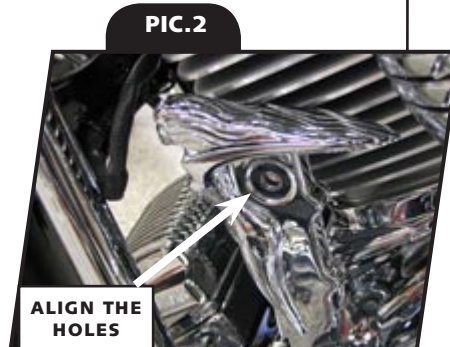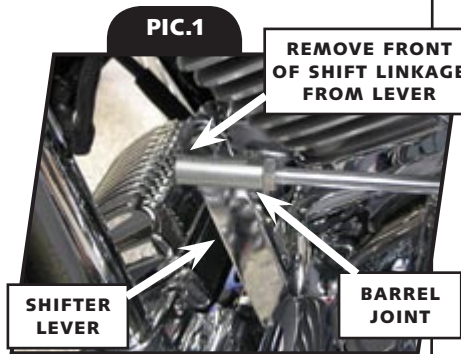

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY
Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 6 Reinstall the rear of the shift linkage to the transmission lever.

STEP 7 Ensure that the shifter operates properly and has sufficient clearance before operating the motorcycle.

Ride On!

Kuryakyn

PAGE

2

SILHOUETTE ACCENT

INSTALLATION