



MIRROR CAPS FOR FLHX

1427

FITS: '06-UP FLHX AND ANY '96-UP FLHT, FLHTC, OR FLHTCU EQUIPPED WITH H-D P/N 91945-98B

PARTS INCLUDED

- 2 Mirror Cap
- 2 Alcohol Pad
- 1 Adhesive Primer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Torx drivers, combination wrenches or socket set and ratchet, soapy water and a clean rag

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.


PROCEDURE

STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition.

STEP 2 Remove the seven stock Torx screws securing the outer fairing to the inner fairing; set them aside, they will be re-used. See FIG.1. The bottom two screws are located on the back side of the outer fairing skirt.

ATTENTION! Assistance is recommended to handle the outer fairing and remove the headlight when all of the screws are being removed to prevent damage.

FIG.1

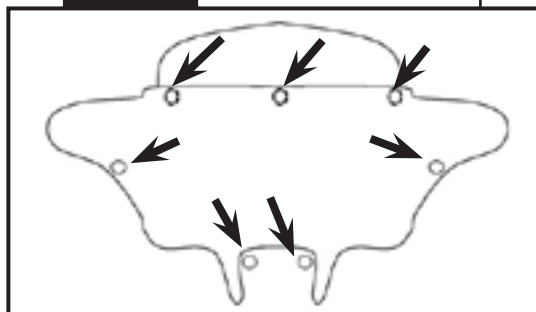

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 3 Set the outer fairing on a soft, sturdy surface.

STEP 4 Remove the nuts securing the stock mirrors to the inner fairing. See [PIC.1](#).

STEP 5 Remove the mirror backing plates (See [PIC.1](#)); Set them aside, they will be re-used.

STEP 6 Clean the backside of the mirrors with soapy water and a clean rag; allow the mirrors to dry completely.

ATTENTION! Thoroughly clean the area of grease, oil, dirt, or other debris to ensure proper adhesion. Küryakyn WILL NOT warranty any parts lost due to improper installation.

ATTENTION! The adhesive may not correctly bond if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

STEP 7 Locate the included primer tube. Follow the instructions on the tube to activate the primer. Apply the primer to the backside of the mirror; allow the area to dry completely.

CAUTION! Follow all warnings and cautions printed on the primer tube to avoid injury or damage.

STEP 8 Rub the adhesive backing on the backside of the Mirror Caps to activate the adhesive.

STEP 9 Remove the adhesive backing.

STEP 10 Place the Mirror Caps over the backside of the stock mirrors and press into place for at least 60 seconds for the best adhesion. Full bond strength will occur within 24 hours.

STEP 11 Install the mirror in the reverse order it was removed in STEP 4 and STEP 5. Ensure that the indexing pin on the mirror locates in the hole in the inner fairing and the backing plate before tightening the nut.

STEP 12 Repeat STEP 7 through STEP 11 for the other side.

STEP 13 Reinstall the outer fairing and secure with the seven stock screws from STEP 2.

CAUTION! It is the installer's responsibility to ensure all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

STEP 14 Adjust the mirrors for proper visibility before riding the motorcycle.

Ride On!

