

. . . .

TRANSFORMER BACKREST W/FOLD DOWN RACK

1606

PARTS INCLUDED

1 Transformer Sissy Bar

1 Hardware Kit Containing

4 5/16"-24 X 5/8" Socket Head Cap Screws

4 5/16" Flat Washers

4 5/16" Hot Spots

1 Anti-Seize

1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING

THE CONTENTS DESCRIBED HEREIN CAN RESULT IN

POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! This indication alerts you to the fact that ignoring the contents

described herein may negatively affect product performance and

functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents

described herein can result in potential injury or material

damage.

TOOLS SUGGESTED

Set of Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the

ignition.

STEP 2 Refer to the Küryakyn model specific side strap instructions for detailed

mounting procedures.

ATTENTION! Be sure to use the supplied anti-seize on all threaded fasteners before installation. This will reduce galling and make future removal of the

fasteners easier.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - •The product must be properly installed, maintained and operated under normal conditions.
 - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breech of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- •Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- •Küryakyn makes no warranty of any kind in regard to other manufacturer¹s products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



-cont.-

|*Küryakyn*°


STEP 3 Line up the holes from the backrest with the four holes from the side straps. Install the flat washers on the four screws and liberally apply anti-seize to the threads and tighten to 17 ft-lbs.

STEP 4 After installation, check for proper clearance and angle of the fold down rack.

STEP 5 Loosen the thumbscrew on the backrest to reveal the luggage rack. The thumbscrew is shown in PIC1.

There are two setscrews in the backrest for adjusting the angle of the fold down luggage rack. Adjust the setscrews equally to ensure the luggage rack stays level when a load is applied. (Refer to PIC'S 2 & 3)


NOTE: Ten pounds is the maximum load for the luggage rack.



WARNING! SISSY BARS ARE NOT A SAFETY RESTRAINING DEVICE. FAILURE TO HOLD ONTO THE MOTORCYCLE MAY RESULT IN INJURY OR DEATH.

CAUTION! Be sure that luggage or any items attached to the fold-out luggage rack are secured properly. The items loaded should have an attachment point to the upright portion of the sissy bar, the rack and/or the motorcycle itself, as needed to prevent the load from shifting or falling off.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

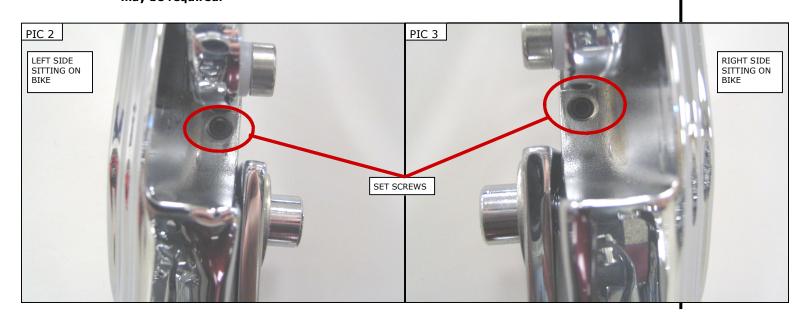

Ride On! PAGE 2

TRANSFORMER BACKREST

INSTALLATION