



INSTALLATION

RAPTOR BAR PLUS

1622

PARTS INCLUDED

- 1 Raptor Bar And Pad Assembly
- 1 Hardware Kit Including:
 - 4 1/4"-20 x 5/8" Socket Head Cap Screws
 - 2 1/4"-20 x 1/2" Socket Head Cap Screws
 - 1 Front Trim (not used with back pad)
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Set of Hex Wrenches, Set of Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

NOTE: The Raptor Bar Plus requires that your motorcycle has, or you have purchased separately, sissy bar side plates for mounting the Raptor Bar Plus to your motorcycle.

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.

-cont.-

1622-21MC-0711

kuryakyn.com




STEP 2 If you have saddle bags you may need to remove them so you can get to the side plate bolts.

STEP 3 If you have existing side plates on your bike: loosen the front side plate bolts and remove the rear side plate fasteners. This will allow you to pivot the side plates forward for easier access to the sissy bar mounting bolts. If you do not have side plates on your bike: install the front bolts in the new side plates (purchased separately), and proceed to Step 5.

STEP 4 Remove the four fasteners that are now holding your sissy bar in the side plates. Remove the sissy bar.

STEP 5 Insert the new Raptor Bar Plus into the side plates and secure with the four 1/4"-20 x 5/8" Socket Head Cap Screws. Make sure to insert the Raptor Bar Plus as far as possible into the side plates. The shoulders on the Raptor Bar Plus should be as close to the sissy bar mounts on the side plates as possible. PIC 1 It would be a good idea to use blue thread locker on these fasteners.

WARNING! IT IS UP TO THE INSTALLER TO ENSURE THE MOUNTING BOLTS FOR THE RAPTOR BAR PLUS TIGHTEN THE BAR TO THE SIDE PLATES SECURELY. IF THE RAPTOR BAR PLUS IS LOOSE FITTING IN THE SIDE PLATE MOUNTS, SERIOUS INJURY OR DEATH COULD OCCUR.

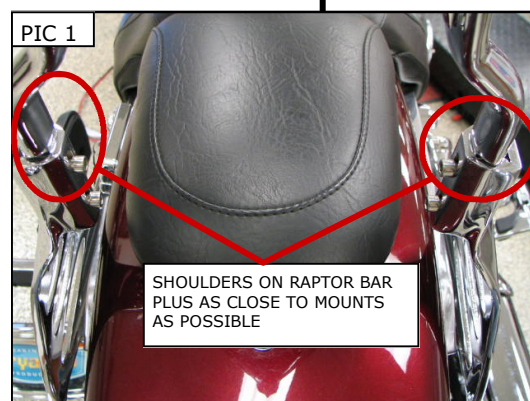

STEP 6 If you have existing side plates on your bike: reinstall the two rear fasteners through the side plates that were removed in STEP 2. Tighten all four of the fasteners that secure the side plates to the motorcycle. If you are installing new side plates on your bike: Proceed with the installation instructions included with them.

CAUTION! Never operate the bike with a passenger without having the pad on the Raptor Bar Plus installed.

WARNING! SISSY BARS ARE NOT A SAFETY RESTRAINING DEVICE. FAILURE TO HOLD ONTO THE MOTORCYCLE MAY RESULT IN INJURY OR DEATH.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.