

## INSTALLATION INSTRUCTIONS

### MIRROR ADAPTERS FOR YAMAHA, BLACK

1893

#### THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Mirror Adapter Left Hand Thread
- 1 Mirror Adapter Right Hand Thread

#### YOU WILL ALSO NEED:

Set of Hex Wrenches, Metric and Standard combination wrenches

**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.


**NOTICE** Refer to PIC 1. Be aware that there is a left and right threading adapter provided.

If the flange nut turns left (counter-clockwise) it is the left threaded adapter and will mount on the left side of the bike (clutch-side).

If the flange nut turns right (clockwise) it is the right threaded adapter and will mount on the right side of the bike (brake-side).

#### RIGHT SIDE MIRROR

**STEP 2** Refer to PIC 2. Locate Mirror Adapter Right Hand Thread and Flange Nut assembly. Place a drop of Red Loctite on the end of the adapter that threads into the mirror and thread the M10-1.25 adapter with right hand threads into the stem of the right side mirror that you are mounting to the bike until it bottoms. DO NOT exceed 20 foot pounds of torque when tightening the adapter to the mirror stem. Secure with set screw if applicable to your mirrors.

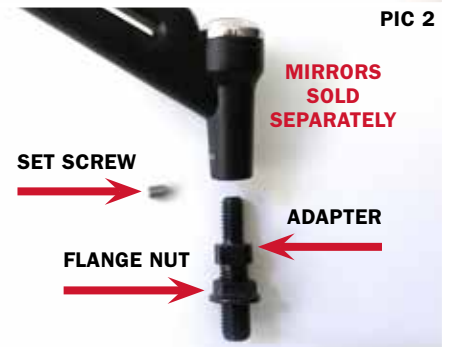

## INSTALLATION INSTRUCTIONS

### MIRROR ADAPTERS FOR YAMAHA, BLACK

1893

-CONTINUED-

**STEP 3** Refer to PIC 3. Thread the flange nut until loosely seated against stop.



**STEP 4** Thread mirror and adapter assembly to the stock mirror mounting point on right side of bike until loosely seated. Back (un-thread) the assembly out to the desired vision position.

**STEP 5** Refer to PIC 4. Thread the flange nut down the adapter to the stock mirror mounting point. Finger tighten.

**STEP 6** Holding the adapter with a wrench in adjusted position, tighten flange nut to the stock mirror mounting point.



### LEFT SIDE MIRROR

**STEP 7** Refer to PIC 2. Locate Mirror Adapter Left Hand Thread and Flange Nut assembly. Place a drop of Red Loctite on the end of the adapter that threads into the mirror and thread the M10-1.25 adapter with left hand threads into the stem of the left side mirror that you are mounting to the bike until it bottoms. DO NOT exceed 20 foot pounds of torque when tightening the adapter to the mirror stem. Secure with set screw if applicable to your mirrors.

**STEP 8** Refer to PIC 3. Thread the flange nut until loosely seated against stop.

**STEP 9** Thread mirror and adapter assembly to the stock mirror mounting point on left side of bike until loosely seated. Back (un-thread) the assembly out to the desired vision position.

**STEP 10** Thread the flange nut down the adapter to the stock mirror mounting point. Finger tighten.

**STEP 11** Holding the adapter with a wrench in adjusted position, tighten flange nut to the stock mirror mounting point.

**STEP 12** Tighten all fasteners.

### NOTICE

IT IS THE END USER'S RESPONSIBILITY TO ENSURE THAT ALL FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST OR DAMAGED DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

## INSTALLATION INSTRUCTIONS

### MIRROR ADAPTERS FOR YAMAHA, BLACK

1893

-CONTINUED-

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

#### ©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)