



INSTALLATION

GRANTAILGATER BAG

4172

PARTS INCLUDED

- 1 GranTailgater Bag
- 1 Rain Cover
- 1 Backrest Pad
- 1 Cooler
- 4 Adjustable straps with clips
- 2 Straps with hook and loop adjuster
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

NOTICE IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

NOTE: This bag can be mounted to the motorcycle many different ways. These instructions provide a general overview of likely possibilities. Installation shown on a V-Star 1100 and a Road King; while representative of typical procedure, there may be minor differences when installed on other models.

SISSY BAR MOUNTING PROCEDURE

STEP 2 Open up both sides of the hook and loop flaps; set the bag on the passenger pillion.

STEP 3 Tightly fold the right side flap over the sissy bar and secure it to the inside of the left flap.

STEP 4 Fold the left flap back over the sissy bar and secure it to the right side of the bag; this will create a very secure, "doubled up" anchor point to the motorcycle. PIC 1, PIC 2, and PIC 3

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



kuryakyn.com

STEP 5 The bag can now be further secured to the motorcycle with the included straps. Hook one end of a strap through a "D" ring on the bottom of the bag; attach the other end to a passenger foot peg mount, turn signal bar or some other anchor point free from moving parts, extreme heat or pinch points.

NOTICE Secure all straps away from visible painted surfaces, moving parts, pinch points or extreme heat.

STEP 6 Ensure the bag has been mounted sturdily before loading and operating the motorcycle.

WARNING ALWAYS FOLLOW MANUFACTURER'S RECOMMENDATIONS ON LOAD LIMITS. LOAD ONLY IN COMPLIANCE WITH YOUR VEHICLE OWNER'S MANUAL. OVERLOADING THE MOTORCYCLE MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

NOTICE Ensure that all the compartments are completely zipped up and the transport handle fully collapsed before operation.

OPTIONAL SISSY BAR MOUNTING PROCEDURE

NOTE: The bag can be mounted with the hook and loop strips facing forward to allow the use of an included driver backrest. You will need to secure the bag using the included straps.

STEP 7 Set the bag on the passenger seat.

STEP 8 Secure the GranTailgater bag to the motorcycle using the included straps. Clip one end of a strap into a "D" ring on the bottom of the bag and secure the other end to a passenger foot peg mount, turn signal bar or some other anchor point free from moving parts, extreme heat or pinch points.

NOTICE For normal loads, a four point tie down arrangement is acceptable. For heavier loads, it is recommended that you stabilize the bag using the additional two straps secured to an anchor point free from moving parts, extreme heat or pinch points.



STEP 9 Locate the included driver backrest; secure it to the bag with the hook and loop strips on the flaps on the back of the bag. PIC 4

STEP 10 Position the backrest for comfort; ensure the bag has been mounted sturdily before loading and operating the motorcycle.

WARNING DO NOT REST ALL OF YOUR WEIGHT DIRECTLY ON THE BACKREST; IT IS NOT INTENDED AS A SUPPORT. THE BAG MAY SHIFT OR COLLAPSE CAUSING LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

WARNING ALWAYS FOLLOW MANUFACTURER'S RECOMMENDATIONS ON LOAD LIMITS. LOAD ONLY IN COMPLIANCE WITH YOUR VEHICLE OWNER'S MANUAL. OVERLOADING THE MOTORCYCLE MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

-cont.-

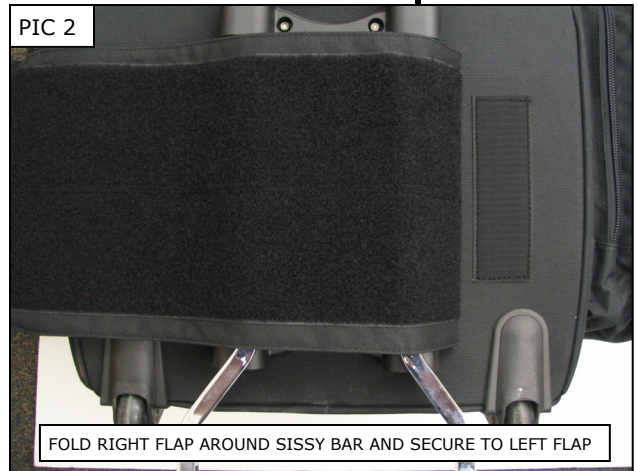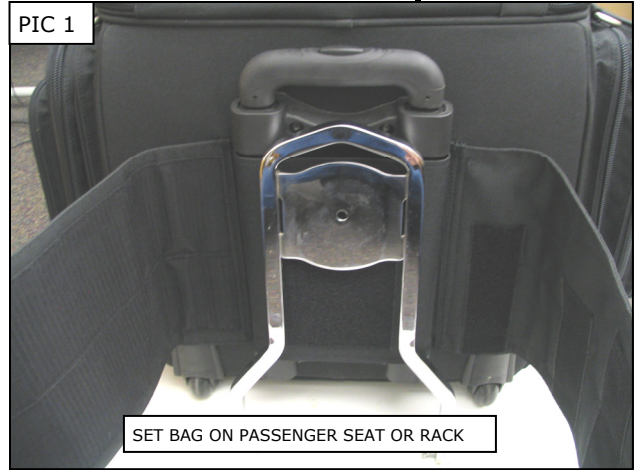


NOTICE

Ensure that all the compartments are completely zipped up and the transport handle fully collapsed before operation.

REAR RACK MOUNTING PROCEDURE

- STEP 11** Open up both sides of the hook and loop flaps; set the bag on the rear rack.
- STEP 12** Tightly fold the right side flap over the sissy bar and secure it to the inside of the left flap.
- STEP 13** Fold the left flap back over the sissy bar and secure it to the right side of the bag; this will create a very secure, "doubled up" anchor point to the motorcycle. PIC 1, PIC 2, PIC 3 and PIC 5
- STEP 14** The bag can now be further secured to the motorcycle with the included straps. Hook one end of a strap through a "D" ring on the bottom of the bag; attach the other end to a passenger foot peg mount, turn signal bar or some other anchor point free from moving parts, extreme heat or pinch points.

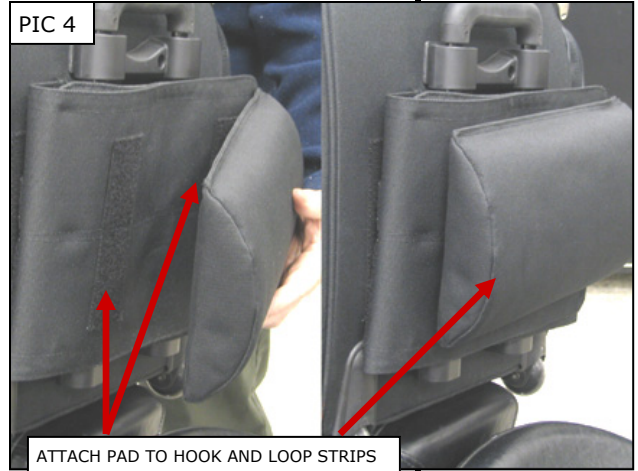

NOTICE

For normal loads, a four point tie down arrangement is acceptable. For heavier loads, it is recommended that you stabilize the bag using the additional two straps secured to an anchor point free from moving parts, extreme heat or pinch points.

- STEP 15** Ensure the bag has been mounted sturdily before loading and operating the motorcycle.

WARNING

ALWAYS FOLLOW MANUFACTURER'S RECOMMENDATIONS ON YOUR LUGGAGE RACK FOR LOAD LIMITS. LOAD ONLY IN COMPLIANCE WITH YOUR VEHICLE OWNER'S MANUAL. OVERLOADING THE LUGGAGE RACK AND/OR MOTORCYCLE MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.



NOTICE

Ensure that all the compartments are completely zipped up and the transport handle fully collapsed before operation.

RAIN COVER PROCEDURE

- STEP 1** Remove the rain cover from the storage compartment, encase the bag with the cover and pull the drawstring tight around the bottom of the bag. Ensure that the rain cover is wrapped tightly under the bag for best protection.

TRANSPORT HANDLE

- STEP 1** Press the button on the top of the handle in and pull upwards until the handle locks in place, release the button.
- STEP 2** To collapse the handle, press the button in and push downward until the handle locks in place.

NOTICE

Ensure that all the compartments are completely zipped up and the transport handle fully collapsed before operation.

Ride On!