



INSTALLATION

SKINNI MINI STRIP LIGHTS—AMBER 5044

PARTS INCLUDED

- 2 Skinni Mini Strip Lights— Amber
- 1 Hardware Kit Containing:
 - 4 Male Spade Connectors
 - 4 Female T-Tap Connectors
 - 1 Dielectric Grease Pack
 - 1 Alcohol Pad
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Ammonia Based Cleaner such as Window Cleaner, Scissors or Razor Knife, Silicone Sealer


STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

STEP 2 Test fit the Skinni Mini light to the desired mounting area. Lights are single circuit.

NOTE: The Skinni Mini lights will not make a 90 degree bend. This will break the circuit board. The smallest bend they will form is 1/2". PIC 1

NOTE: Examine the light carefully. As shown in PIC 2, notice the markings on the light specifying the place to cut the light. If you need to shorten the light for your application, always make your cut from the end of the light opposite the wire leads. The light is emitted from the side of the LED closest to the edge of the strip. Keep this in mind before installing the lights.

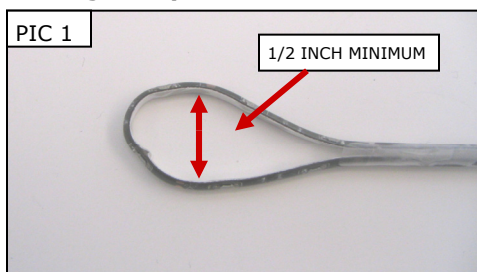

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



kuryakyn.com

STEP 3 If necessary, the lights may be trimmed to custom lengths (every 2 lights). **Make sure that you make your cut from the end opposite from the wire leads.** Kuryakyn recommends using silicone to seal the cut end to prevent corrosion. PIC 2

STEP 4 Clean the mounting area with an ammonia based surface cleaner. Dry the area completely. Wipe the mounting area with the included alcohol pad to remove any residue and dry the area completely.

ATTENTION! Ensure the area of installation is free of grease, oil, dirt or other debris including wax/polish products and bugs to ensure proper adhesion. Küryakyn WILL NOT issue a warranty on any parts lost due to improper installation.




ATTENTION! The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

STEP 5 Bench test the lights and test fit the light to ensure the light is emitted correctly.

NOTE: Solid Black Wire = Ground
Black Wire with White Stripe = Power

STEP 6 Apply the lights to the cleaned mounting area. Run the power wire to the desired power source. Run the ground wire to a good ground source. With the Skinni Mini lights stuck in place, strip the end of each wire lead and crimp one male spade connector to each wire lead.

NOTE: Because the wire lead is a small gauge, it is recommended to strip enough insulation so you can double back the wire before you crimp on the male spade. PIC 3

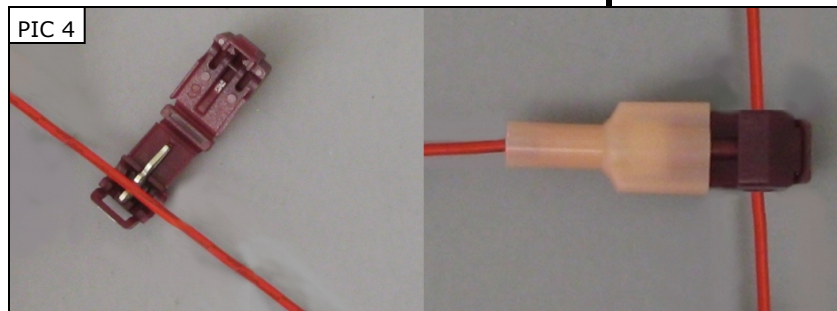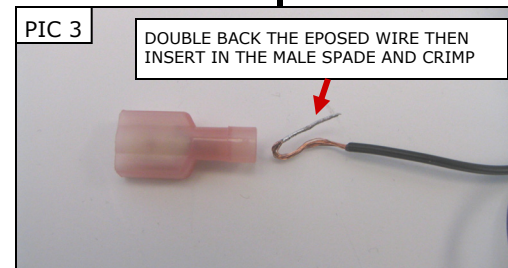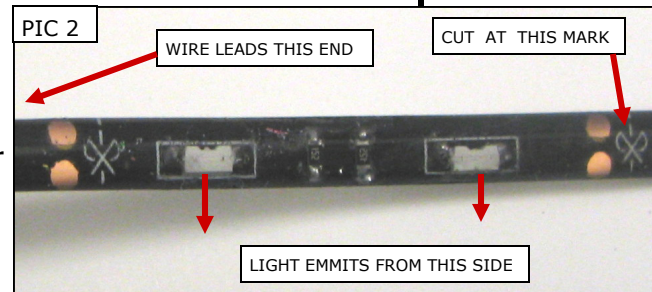

CAUTION! Connect lights to power circuit upstream from a Panacea controller or other run-turn-brake controller. Skinni Mini lights will not change color as a Panacea light and Amber Skinni Mini lights should not be used as auxiliary brake lights.

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn WILL NOT issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

ATTENTION! Küryakyn recommends the use of dielectric grease on electrical connections.

STEP 7 Disconnect the battery. Install one of the female T-Tap connectors to the power wires you are using. Apply a small amount of dielectric grease and plug the male spade from the black wire with the white stripe to this female T-Tap. Attach the second female T-Tap to the ground wires that you are using. Apply a small amount of dielectric grease and plug the male spade from the black wire into it. PIC 4

STEP 8 Reconnect the battery and test the lights for proper operation.

WARNING! ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.