

INSTALLATION INSTRUCTIONS

ISO GRIPS, STREET 500/750, CHROME

6408

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|-------------------------------|---|-----------------------------|
| 1 | Throttle Side ISO Street Grip | 1 | Tube of Adhesive |
| 1 | Clutch Side ISO Street Grip | 1 | Gray Plastic Spacer .730 ID |

YOU WILL ALSO NEED:

Phillips Screwdriver, Sharp Utility Knife, Sandpaper or Emery Cloth, Needle Nose Pliers, Safety Glasses, Clean Rag, Tape Measure

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

PICTURES SHOWN ARE OF THE GLOSS BLACK PARTS. INSTALLATION OF THE CHROME PARTS WILL BE THE SAME.


- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

WARNING A FACTORY SERVICE MANUAL WILL BE HELPFUL IN PERFORMING THIS INSTALLATION. DO NOT ATTEMPT TO PERFORM THIS INSTALLATION IF YOU ARE NOT CONFIDENT IN YOUR ABILITY TO COMPLETE ALL OF THE STEPS IN THE PROCEDURE; CONSULT A TRAINED TECHNICIAN. IMPROPER INSTALLATION COULD RESULT IN SERIOUS INJURY OR DEATH.

INSTALLATION OF THROTTLE SIDE

- STEP 2** Refer to PIC 2. Remove the fasteners (usually two Phillips screws) that hold the two halves of the handlebar switch housings together. Some models also have a throttle cable retainer that must be removed. Separate the switch housings.

- STEP 3** Refer to PIC 2. If the bike is equipped with a cable adjusters, adjust them for maximum cable slack (shorten the cable housing).

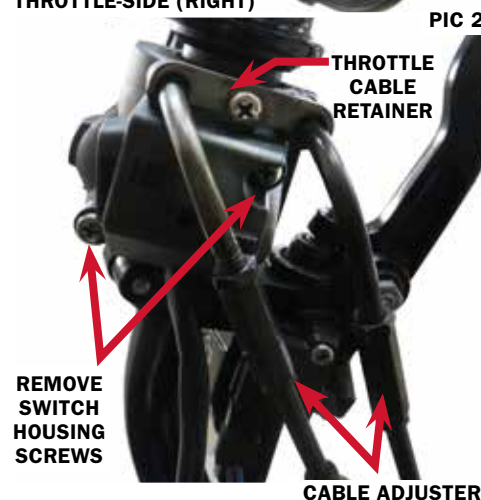

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM
454 COUNTY ROAD VV SOMERSET, WI 54025



INSTALLATION INSTRUCTIONS

ISO GRIPS, STREET 500/750, CHROME

6408

-CONTINUED-

- STEP 4** Carefully remove the cable ferrules from the throttle twist grip. Careful use of needle nose pliers can help here — do not damage the cable.
- STEP 5** Refer to PIC 3. Slide the new ISO-Grip into place and install the throttle cables and ferrules into the new throttle sleeve in the same manner as they removed from the stock grip.
- STEP 6** Re-assemble the switch housings. Adjust the throttle cables. Test for free unrestricted movement in the throttle. It must operate freely, without any restriction.
- STEP 7** Ensure proper brake lever operation and clearance before operating the motorcycle.

WARNING

ROTATE THROTTLE AND CHECK THAT IT MOVES FREELY AND RETURNS TO CLOSED BEFORE STARTING BIKE. FAILURE TO PROPERLY ADJUST THE THROTTLE CABLES COULD RESULT IN LOSS OF CONTROL CAUSING SERIOUS INJURY OR DEATH.

NOTICE

IT IS THE END USER'S RESPONSIBILITY TO ENSURE THAT ALL FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST OR DAMAGED DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



INSTALLATION OF CLUTCH SIDE

- STEP 8** Remove the existing grip and bar end weight from the handlebars. Using a razor blade or utility knife, cut the grip lengthwise from the switch housing out towards the end of the grip. Lift up the outer portion of the grip at the split that was made with the razor blade and peel it away from the handlebar. This may take some effort, as the grips are glued on from the factory.
- STEP 9** With sandpaper or emery cloth remove all grip and adhesive residue from the exposed handlebar. The surface should be completely clean and slightly roughed from the sanding. With an ammonia based cleaner or similar degreasing agent and a clean rag, wipe off the exposed handlebar.
- STEP 10** Some motorcycles have the switch housings "pinned" in place making it impossible to relocate them. If the exposed handle bar on the clutch side is shorter than the length of the ISO-Grip, the end rubber will not be fully supported once installed. Measure the length of exposed handle bar on the clutch side. Measure the depth of the left grip. Subtract the length of the handlebar from the depth of the grip; this will give you the length of the spacer required. Using a hack saw or utility knife cut the spacer to length, and de-burr.
- STEP 11** Refer to PIC 4. Insert the spacer into the clutch grip and slide it down as far as possible onto the handlebar to push the spacer all the way to the end. Rotate the grip to determine the orientation that is most comfortable. Be sure to line up the new grip to match the throttle side. Make a mental note of the location or make a non-permanent mark on the grip and/or switch housing. Remove the grip.

CAUTION

USE EXTREME CARE WHEN USING THE GLUE INCLUDED WITH THIS KIT. READ ALL PRECAUTIONS AND AVOID CONTACT WITH SKIN OR EYES.



KURYAKYN.COM

INSTALLATION INSTRUCTIONS

ISO GRIPS, STREET 500/750, CHROME

6408

-CONTINUED-

NOTICE

COVER ANY AREA OF THE MOTORCYCLE WHERE THE GLUE COULD POSSIBLY DRIP DURING INSTALLATION.

STEP 12

With an ammonia based cleaner or similar degreasing agent and a clean rag, wipe off the exposed handlebar and the inside of the grip to remove any contaminants. Insert the spacer from STEP 11, if needed, into the clutch side grip. Take the supplied tube of adhesive and squeeze a good amount of glue onto the inner side walls of the clutch grip. Rotating the grip while applying the glue will help distribute it evenly. Make sure you get the glue all the way to the end of the rubber insert in the grip.



PIC 5

NOTICE

THE ADHESIVE SUPPLIED SETS UP ALMOST INSTANTLY IN THE ABSENCE OF AIR. THERE IS ENOUGH TIME TO SLIDE THE GRIP INTO PLACE, BUT ONCE IT STOPS MOVING, IT CANNOT BE ADJUSTED.

STEP 13

Refer to PIC 5. In one smooth motion, slide the grip onto the handlebar and into position. Rotate it back and forth slightly as you slide it on to help distribute the glue evenly and keep the grip from "plowing" the glue up against the switch housing. Be sure to line up the new grip to match the throttle side. You must work quickly to get the desired position before the glue dries. (Approx. 6 seconds)

STEP 14

Once in place, squeeze the grip firmly to press the rubber against the bar and hold for 15 seconds. Allow at least 30 minutes to cure before operating the motorcycle. **ENSURE PROPER OPERATION AND CLEARANCE BEFORE OPERATING THE MOTORCYCLE.**



PIC 6

STEP 15

Ensure proper clutch lever operation and clearance before operating the motorcycle.

CAUTION

ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE BEFORE RIDING.

NOTICE

IT IS THE END USER'S RESPONSIBILITY TO ENSURE THAT ALL FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST OR DAMAGED DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



INSTALLATION INSTRUCTIONS

ISO GRIPS, STREET 500/750, CHROME

6408

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice

KURYAKYN.COM

PAGE 4

306408

DPF-MRK-003 REV A 6/7/16

866 277 9598 | INFO@KURYAKYN.COM

454 COUNTY ROAD VV SOMERSET, WI 54025

