

INSTALLATION INSTRUCTIONS

QUICK RELEASE ATTACHMENT POINT KIT FOR TOURING, CHROME

7098

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:


- | | | | |
|---|---------------|---|---|
| 1 | Left Bracket | 1 | Hardware Kit, containing: |
| 1 | Right Bracket | 4 | 3/8-16 x 1.25" Button Socket Head Cap Screw |
| | | 2 | Front Wear Sleeves |
| | | 4 | Rear Wear Sleeves (black nylon) |
| | | 4 | Inner Sleeves (steel) |
| | | 8 | Flat Washers |

YOU WILL ALSO NEED:

Set of Hex Wrenches, Set of Torx Wrenches, Torque Wrench (FT/LBS) and Set of Hex Bit Sockets, Blue Loctite


NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

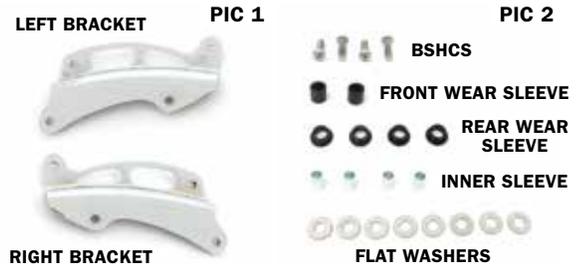

STEP 2 Remove the saddlebags to expose the rear fender struts.

STEP 3 Refer to PIC 3 and 4. Remove existing hardware and fender strut inserts. Set the hardware aside, it will be reused.

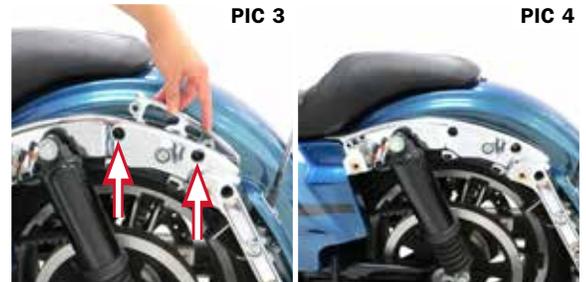

INSTALLATION INSTRUCTIONS

QUICK RELEASE ATTACHMENT POINT KIT FOR TOURING, CHROME

7098

-CONTINUED-

STEP 4 Starting on the left (clutch) side. Locate the Left Bracket.

Note: The bumped up notch is the rear end of the bracket, and the bracket should bend in towards the bike.

STEP 5 Refer to PIC 5 and 6. Align and place the bracket into the rear fender support. Locate hardware that was removed in Step 3. Apply a small amount of Blue Loctite to each screw. Fasten the bracket to the rear fender support. Fully tighten hardware.

TORQUE VALUE FOR REAR FENDER SUPPORT SCREW:
12-18 FT-LBS (16.3-24.4 NM)

STEP 6 Refer to PIC 7. Locate provided two (2) Button Socket Head Cap Screws, four (4) Flat Washers, two (2) Inner Sleeves, two (2) Rear Sleeves, and one (1) front sleeve.

STEP 7 Refer to PIC 8. Place the following parts onto one of the screws in the following order to assemble the front attachment point: flat washer, front sleeve, inner sleeve (slides into the front sleeve), and a flat washer.

STEP 8 Refer to PIC 9. Place the following parts onto the other screw in the following order to assemble the back attachment point: flat washer, rear sleeve with the flat edge against the flat washer, inner sleeve (slides into the rear sleeve), rear sleeve with the flat edge facing out, and a flat washer.

STEP 9 Refer to PIC 9. Fasten the front connecting point assembly to the front mounting hole of the Right Bracket, and the rear connecting point assembly to the rear mounting hole of the bracket. Fully tighten hardware.


TORQUE VALUE FOR CONNECTING POINT ASSEMBLIES:
15 FT-LBS (20.34NM)

STEP 10 Repeat steps 4 through 9 on the right (brake) side.

STEP 11 Reinstall the saddlebags.

STEP 12 Refer to PIC 10. Locate Quick Release Mount for Multi-Purpose Backrest (P/N 7093 - sold separately). Install the mounts per the installation instructions provided with them.

STEP 13 Locate Multi-Purpose Backrest (P/N 1660 or 1661 - sold separately). Test fit the backrest between the fixed mounts. The Backrest should slide easily between the fixed mounts.

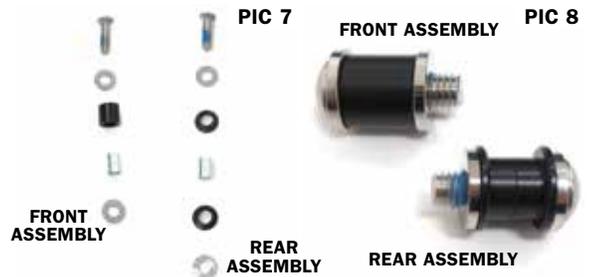

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM
454 COUNTY ROAD VV SOMERSET, WI 54025



INSTALLATION INSTRUCTIONS

QUICK RELEASE ATTACHMENT POINT KIT FOR TOURING, CHROME

7098

-CONTINUED-

STEP 14 Refer to PIC 11 through 13. Install the backrest to the Fixed Mounts by inserting one of the supplied (with the backrest) 5/16"-18 X 7/8" countersunk socket head cap screws through one of the supplied shoulder washers, through the Fixed Mount and threading it to the Driver/Passenger Backrest on each side. Fully tighten hardware. If these fasteners are loosened or removed, see **WARNING!** below.

TORQUE VALUE FOR BACKREST SCREWS:
15 FT-LBS (20.34 NM)

WARNING BOTH PIVOT/HINGE SCREWS MUST HAVE THREADLOCK COMPOUND RE-APPLIED AND RE-TORQUED ONCE REMOVED, AFTER INITIAL INSTALLATION. FAILURE TO DO SO MAY RESULT IN UNINTENDED LOOSENING AND MAY CAUSE SERIOUS INJURY OR DEATH. THE FEMALE THREADS IN THE MULTI-PURPOSE BACKREST AND THE THREADS ON THE REMOVED SCREWS WILL NEED TO BE CLEANED TO REMOVE ANY THREADLOCK RESIDUE BEFORE RE-INSERTING. RE-APPLY LOCTITE® THREADLOCK BLUE 242® OR EQUIVALENT, AS SHOWN IN PIC13, RE-TORQUING TO 15 FT-LBS (20.3 NM) USING A TORQUE WRENCH AND 3/16" ALLEN/HEX KEY ATTACHMENT. LET CURE PER THE THREADLOCK MANUFACTURERS INSTRUCTIONS AFTER INSTALLATION. IF YOU DO NOT WISH TO APPLY THREADLOCK, THEN ORDER A NEW SERVICE KIT, (P/N 991660) WHICH WILL CONTAIN SCREWS WITH BLUE THREADLOCK ADHESIVE PRE-APPLIED.

STEP 15 Refer to PIC 15 and 16. Check the operation of the Backrest by folding the locking levers to the straight out position. Lower or raise the backrest to the desired location. Fold the locking levers over to lock them in place. Gently rock the Backrest back and forth to ensure the locking pins are engaged in the notches in the Fixed Mounts. Repeat for the other position of the Backrest. Visually inspect the Shoulder Washers and Countersunk Socket Head Cap Screws at the pivot point for any signs of loosening before each ride. Kuryakyn requires checking all backrest attaching fasteners to the torque specifications defined in these instructions every 3,000 to 5,000 miles.

Note: See instructions for Multi-Purpose Driver/Passenger Backrest, P/N 1660 or P/N 1661, for adjustment procedures.


WARNING THIS BACKREST IS NOT DESIGNED AS A SAFETY RESTRAINING DEVICE. FAILURE TO HOLD ONTO THE MOTORCYCLE MAY RESULT IN SERIOUS INJURY OR DEATH.

CAUTION ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE BEFORE RIDING.

NOTICE IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



PIC 13

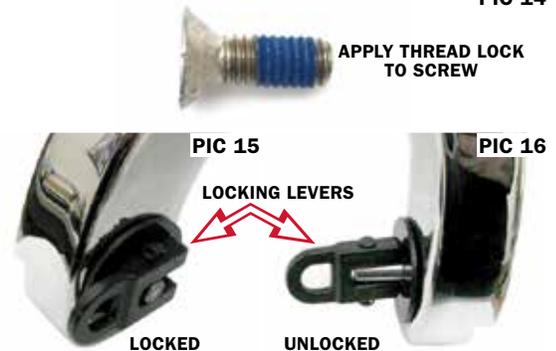

PIC 14

APPLY THREAD LOCK TO SCREW

PIC 15

PIC 16

LOCKING LEVERS

LOCKED

UNLOCKED

FINAL



INSTALLATION INSTRUCTIONS

QUICK RELEASE ATTACHMENT POINT KIT FOR TOURING, CHROME

7098

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice