



CHROME PASSING LAMP TRIM RINGS

7277

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION

This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 2 Chrome Passing Lamp Trim Rings
- 1 Hardware Kit:
 - 2 M3 X 0.5 Custom Nut
 - 2 M3 X 0.5 X 35 mm Phillips Pan Head Screw
 - 1 Foam Spacer Strips (pair)
- 1 Installation Instructions

TOOLS SUGGESTED

Phillips-head screwdriver

NOTICE

If installing this product for another party, please make sure they receive this copy of the installation instructions so they are aware of the important information contained in them.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.
- STEP 2** Protect the front fender with a service cover or soft, clean towel.
- STEP 3** Holding both the existing trim ring and passing-lamp, remove the screw and nut in the trim ring. PIC 1
- STEP 4** Gently pull the trim ring off of the lamp housing. Hold onto the lamp, as you remove the trim ring, to prevent it from falling out. Set the trim ring, screw, and nut aside; they will not be re-used.
- STEP 5** Align the notches in the lamp ring (PIC 2) with the alignment bosses on the back-side of the lamp as shown in PIC 2. Ensure that the passing lamp is top-side up.

NOTE: Some replacement lamps have only one alignment boss.

- STEP 6** Position the tab (PIC 2) on the lamp ring so that it fits in the notch on the lamp housing. PIC 2

-cont.-

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



kuryakyn.com

STEP 7 Hold the lamp in the housing and position the Chrome Passing Lamp Trim Ring over the top of it. PIC 3 and 4

NOTE: Ensure that the notches in the lamp and the tab on the lamp ring are still aligned.

STEP 8 Gently push the Chrome Trim Ring onto the housing. Ensure that the flange on the backside of the Chrome Trim Ring fits in the groove in the lamp housing.

STEP 9 Insert an included Phillips Pan Head Screw through the holes in the bottom of the Chrome Trim Ring. PIC 5

STEP 10 Hold the Custom Nut in the position shown in PIC 5. Begin threading the screw into the nut.

STEP 11 Ensure that everything is still aligned, then tighten the screw. **DO NOT OVER TIGHTEN THE SCREW.** The Trim Ring and lamp should be snug.

If it is difficult or impossible to get the flange on the backside of the Chrome Trim Ring to properly engage the groove in the lamp housing, replace the lamp ring with the included Foam Spacer Strips





Remove Chrome Trim Ring. Unplug the lamp and move the lamp ring. Set the lamp ring aside, it will not be re-used.

Peel paper backing off the included Foam Spacer Strips.

Stick the Foam Spacer Strips to the outside edge of the lamp. PIC 6

Re-install the lamp and Chrome Trim Ring (without the lamp ring) as outlined in STEPS 7 through 11. Ensure the lamp is aligned with the top side up.

NOTICE

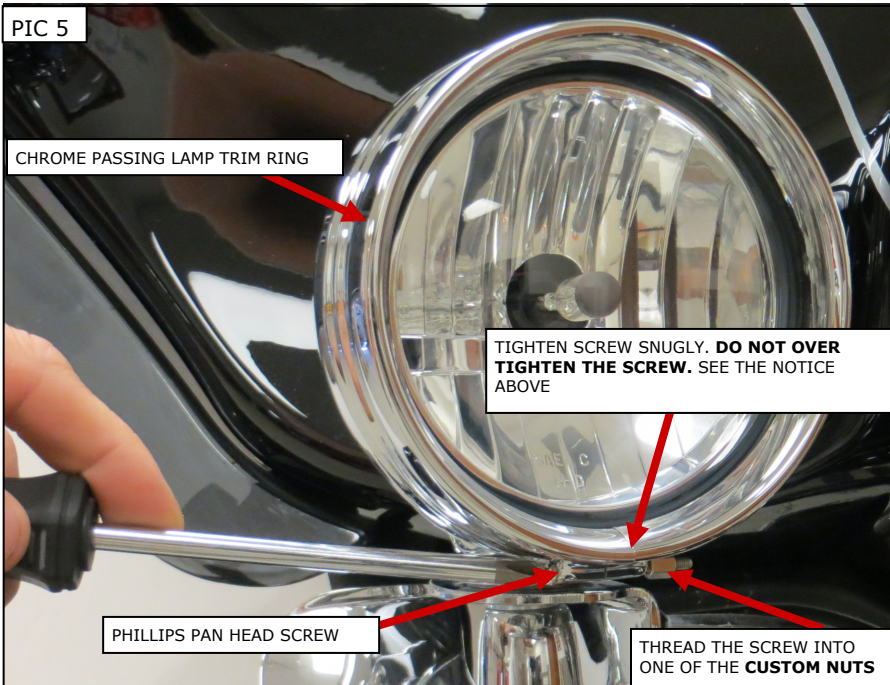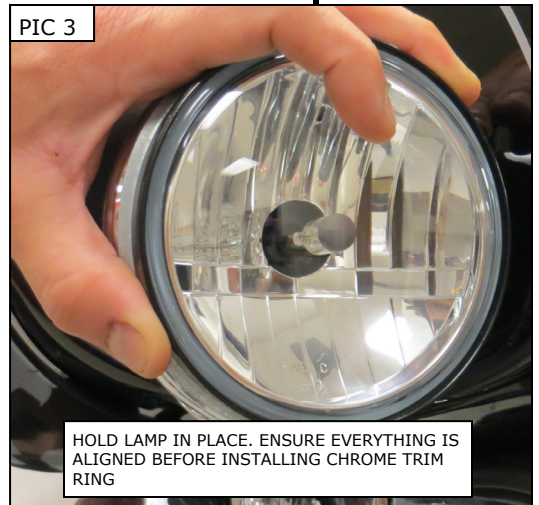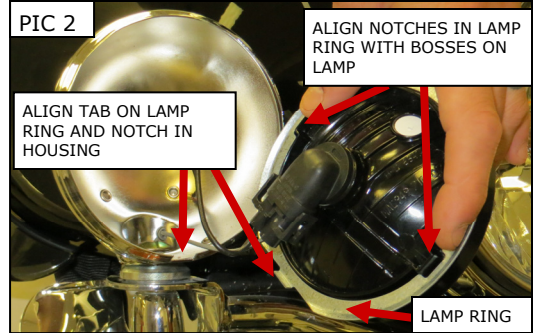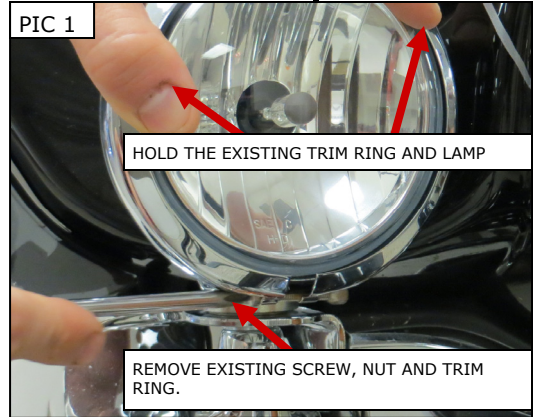

STEP 12
Test passing lamp


PAGE
2

-cont.-

for correct function before riding the motorcycle.



VISIBILITY IS A **MAJOR** CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY. ENSURE PROPER LIGHT OPERATION **BEFORE** RIDING THE MOTORCYCLE.

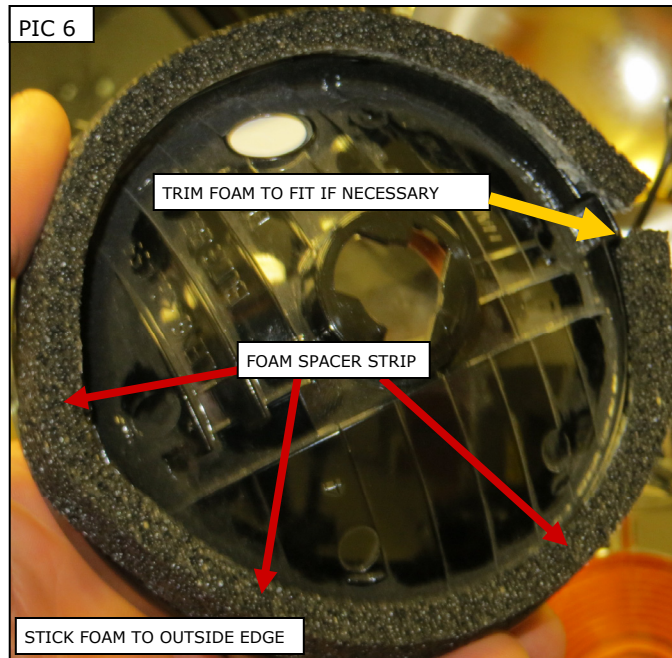

Ride On!