



SHARK SKIN RADIATOR GRATE 7329

FITS: ALL '06-UP GL1800 MODELS

PARTS INCLUDED

- 1 Left Side Radiator Grate
- 1 Right Side Radiator Grate
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches, Socket Set with Extensions and Ratchet, Screwdrivers

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.


PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

ATTENTION! A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all of the steps in the procedure; consult a trained technician.

STEP 2 Carefully remove the clutch side fairing molding trim piece shown in PIC 1; starting at the bottom of the molding and working your way up pulling out to disengage the tabs.

STEP 3 Open the clutch side fairing pocket lid and remove the four (4) trim clips by pushing in on the center and then pulling the clips out. Set the clips aside, they will be used for reinstallation later.

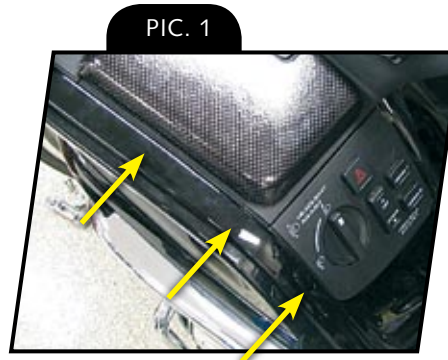

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



STEP 4 Remove the fairing pocket by pulling straight up and out.

STEP 5 Remove the four (4) bolts from the fairing as shown in PIC 2; set them aside, they will be used for reinstallation. Take note of the bolt locations, they will need to be replaced in the same spot they were removed.

NOTE It may be useful to remove the 2 push-pins located inside the front fender area. It will allow the fairing to be pulled away further giving you more room.

STEP 6 Pull the fairing outward to gain access to the radiator grate. Be careful not to break the side panel. Release the air ducting that goes to the lower vent.

STEP 7 Start by carefully pulling down and outward on the bottom of the grate. There are 2 tabs that need to be released (PIC 3). Remove the wire harness from the stock radiator grate. It will be installed on the new grate.

STEP 8 Once the lower section of the grate is free, there is a small button at the rear of the grate that needs to be released (PIC 4) then lift up on the grate to release the top tabs. Remove the stock radiator grate from the bike.

NOTE Check that the tabs on the radiator are straight before mounting the new grate.

STEP 9 To install the new Chrome Shark Skin Grate, start by lining up the rear button (PIC 5) of the new grate behind the tab it snaps in to. Reinstall the wire harness (from Step 7) to the new grate.

STEP 10 Line up the tabs at the top of the new grate with the tabs on the radiator. (PIC 6)

STEP 11 Once the top tabs are engaged and the rear button is joined with the tab, gently push on the bottom edge of the grate until the grate snaps in to place (2 tabs). Test that the grate is snapped in to place by pulling gently on the grate.

STEP 12 Repeat all steps for the opposite side

STEP 13 Tuck any wires away that may have been moved, reconnect the vent ducting (Step 6) and reassemble the fairing in the reverse order it was disassembled and tighten all fasteners

ATTENTION! Secure all wiring away from moving parts, pinch point or extreme heat. Küryakyn WILL NOT issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

Ride On!

