



### KINETIC SHIFT & BRAKE PEG

7655

Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

#### **WARNING**

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

#### **NOTICE**

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Kinetic Peg
- 1 Peg Spacer
- 1 Hardware Kit containing:
  - 2 5/16" Lock Washer
  - 1 M8 X 1.25 X 30 MM Hex Head Cap Screw — Blue dot
  - 1 M8 X 1.25 X 33 MM Hex Head Cap Screw — Red dot
  - 1 M8 X 1.25 X 40 MM Hex Head Cap Screw — No dot
- 1 Installation Instructions

#### **YOU WILL ALSO NEED:**

Large pliers, set of combination Metric wrenches

#### **NOTICE**

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Remove the main fuse.

#### **WARNING**

THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.



- STEP 2** Firmly grasp the existing peg with large pliers; twist the peg counterclockwise to remove it from the lever; it will not be reused.

- STEP 3** Refer to the table below to determine which hardware is necessary for installation.  
 Example: Use the included Spacer, 40MM, Screw, and two Lock Washers to install the Peg on a Roadmaster shift arm.  
 The extended fitment on a Victory is approximately 3/8" (9.5MM) farther out than the standard fitment.

MODEL	SHIFT	BRAKE	SPACER	30MM — BLUE DOT	33MM — RED-DOT	40MM — NO DOT	1 LOCK WASHER	2 LOCKWASHERS
ALL VICTORY (STANDARD)	X			X			X	
ALL VICTORY (EXTENDED)	X	X	X		X			X
SCOUT	X	X				X	X	
ROADMASTER	X		X			X		X
CHIEF	X				X		X	



- STEP 4** Thread the included Screw into the brake/shift lever from the backside until it spins freely on the shoulder.
- STEP 5** Slide one of the included Lock Washers onto the Screw.
- STEP 6** Depending on the application, slide the included Spacer over the Screw, followed by the other Lock Washer.
- STEP 7** Thread the Kinetic Peg onto the screw; adjust as desired. Wrap a shop rag around the Peg (to protect the finish); grasp the Peg with the large pliers (to prevent the it from spinning), then tighten the screw.
- STEP 8** Reinstall the main fuse.

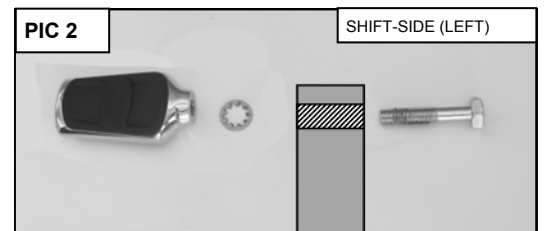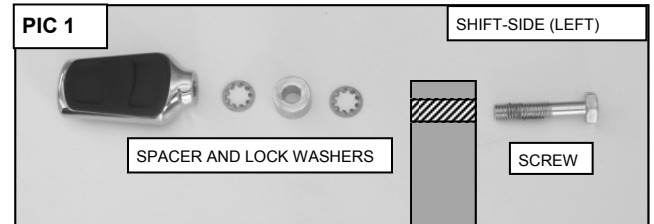

### NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.