



REAR CYLINDER BASE COVER 8394

FITS: '07-UP TOURING MODELS (DRESSERS, ROAD KINGS, ETC). MUST BE USED WITH KURYAKYN TRANSMISSION SHROUDS, P/N'S 7874, 7876 OR 7877.

PARTS INCLUDED

- 1 Rear Cylinder Base Cover
- 1 Bracket
- 1 1/4-20 x 1-1/4 Button Socket Cap Screw (BSCS)
- 3 10-24 x 3/8 Button Socket Cap Screw (BSCS)
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

WARNING! YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

NOTE It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

TOOLS SUGGESTED

Set of hex wrenches, in.-lbs. torque wrench with hex bit sockets.

PROCEDURE


STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Locate your front Kuryakyn transmission shroud (from previous installation or new in the package). If you already have the front shroud installed on your bike, remove it; save all the hardware, it will be reused.

STEP 3 Attach the included bracket to the front transmission shroud with an included 10-24 BSCS as shown in PIC.1. Ensure that the locating pin fits into the front hole on the backside of the transmission shroud. Leave the fastener finger tight for now.

STEP 4 Attach the Rear Cylinder Base Cover to the top of the bracket with two 10-24 fasteners; snug the two fasteners for now. See PIC.2.

-cont.-

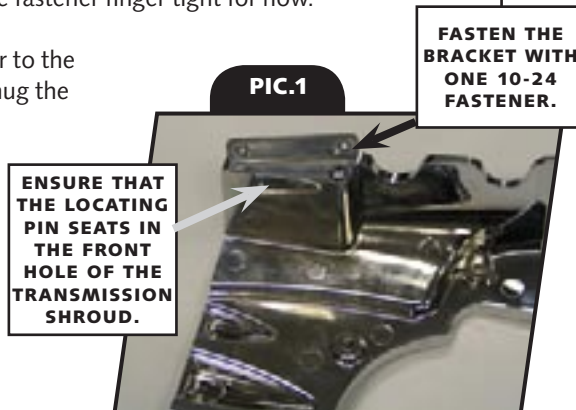

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 5 Align the Rear Cylinder Base Cover with the transmission shroud as shown in PIC.2; tighten the fastener securing the bracket installed in STEP 3.

STEP 6 Temporarily remove the two 10-24 fasteners installed in STEP 4; set the Rear Cylinder Base Cover and fasteners aside.

STEP 7 With the bracket installed on the transmission shroud, install the transmission shroud on the motorcycle (refer to the instructions included with the transmission shroud, if necessary); leave the fasteners finger tight for now.

STEP 8 Remove the front fastener in the transmission cover on the left side of the motorcycle; this fastener will not be reused. See PIC.3.

STEP 9 Set the Rear Cylinder Base Cover in place and secure with the two 10-24 fasteners temporarily removed in Step 6; leave the fasteners loose for now.

STEP 10 Secure the Rear Cylinder Base Cover to the left side of the transmission cover with the included 1/4-20 x 1-1/4 fastener. Torque the new 1/4-20 fastener to 84-132 in-lbs.

STEP 11 Tighten the fasteners from STEP 9 and STEP 7 or continue with the installation of the other covers.

STEP 12 Ensure proper clearance and shifting operation before riding the motorcycle.

Ride On!

Kuryakyn

PIC.2




FRONT OF TRANSMISSION SHROUD

ALIGN THE COVER AND THE SHROUD SO THEY ARE STRAIGHT ACROSS FROM EACH OTHER.

REAR CYLINDER BASE COVER

PIC.3

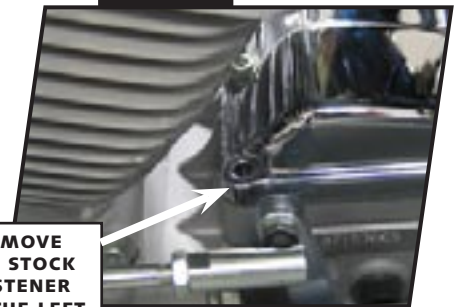

REMOVE THE STOCK FASTENER ON THE LEFT SIDE OF THE TRANSMISSION

PAGE

2

REAR CYLINDER BASE COVER

INSTALLATION