



INSTALLATION



LOWER LEG COVERS FOR TOURING MODELS 8630

FITS: '00-'07 DRESSERS, ROAD KINGS, ROAD GLIDE, STREET GLIDE

PARTS INCLUDED

- 1 Front Fork Cover, Right
- 1 Front Fork Cover, Left
- 1 Rear Fork Cover, Right
- 1 Rear Fork Cover, Left
- 1 Caliper Cover, Right
- 1 Caliper Cover, Left
- 2 Trim Panels
- 1 Axle Nut Cap, Right
- 1 Axle Nut Cap, Left
- 1 Hardware Kit including:
 - 12 10-24 x 3/8" Button Socket Cap Screws (BSCS)
 - 2 Caliper Cover Mounts
 - 1 Right Bracket
 - 1 Left Bracket
 - 4 10-24 x 3/8" Socket Head Cap Screws (SHCS)
 - 2 10-32 x 1/4" Socket Set Screw (SSS)
- 1 Installation Instructions

INSTALLATION COMPLETE



Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches, ft. lbs. torque wrench, and a twelve point socket set and ratchet

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

-cont.-

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



RIGHT SIDE PROCEDURE

STEP 2 Remove the 12 point center caliper bolt as shown in PIC.1 and set aside for now.

STEP 3 Install the caliper cover mount with the tab facing towards the center of the bike, and secure with the bolt removed in STEP 2 (see PIC.3). Torque to 25 ft lbs.

STEP 4 Referring to PIC.1, remove the upper caliper mounting bolt and place the right (left) side mounting bracket (see PIC.2) in place with the tab facing outwards, loosely secure with the upper mounting bolt that was removed.

STEP 5 Remove the lower caliper mounting bolt, and slide the mounting bracket into place; reinsert the bolt and tighten both caliper mounting bolts. (see PIC.2) Torque the upper and lower caliper mounting bolts to 28-38 ft. lbs.

STEP 6 Identify the right (left) side axle cap shown in PIC.4. Thread the 10-32 x 1/4" Socket Set Screw into the cap and install on the axle with the set screw facing down. Tighten the set screw to prevent the cap from moving.

STEP 7 Install the caliper cover using two 10-24 x 3/8" SHCS screws from the hardware kit. Do not tighten the screws until both screws have been installed.

STEP 8 Place the rear cover in place and secure with two 10-24 x 3/8" BSCS screws from the hardware kit (see PIC.5).

STEP 9 Install the front cover, making sure that the tab on the bottom of the cover is placed over the tab on the rear cover.

STEP 10 Loosely install a 10-24 x 3/8" BSCS screw in the tabs on the bottom of the covers as shown in PIC.6.

STEP 11 Referring to PIC.7, determine the top and bottom of the trim piece. Place the trim piece over the seam of the two halves with the notch facing down. Secure the trim piece & two halves together with three 10-24 x 3/8" BSCS screws from the hardware kit.

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

LEFT SIDE PROCEDURE


STEP 1 Repeat STEP 2 through STEP 11 from the right side procedure.

STEP 2 Make sure that all fasteners have been tightened.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

Kuryakyn

PIC.1

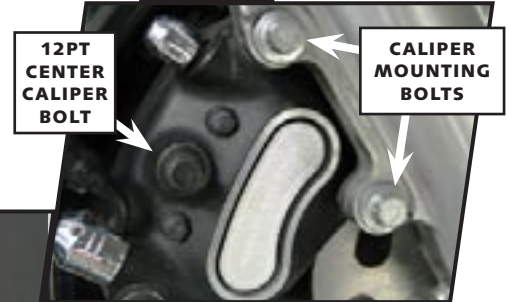

PIC.2


LEFT MOUNTING BRACKET



PIC.3

RIGHT MOUNTING BRACKET

MOUNTING BRACKETS IN PLACE

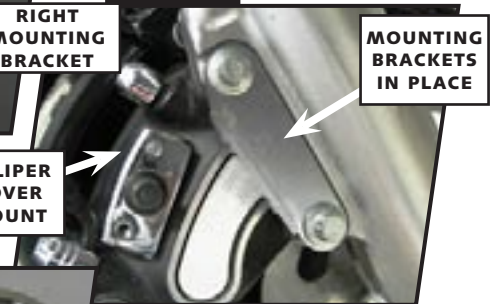

PIC.4


LEFT SIDE AXLE CAP

RIGHT SIDE AXLE CAP



PIC.5

REAR COVER MOUNTING SCREWS

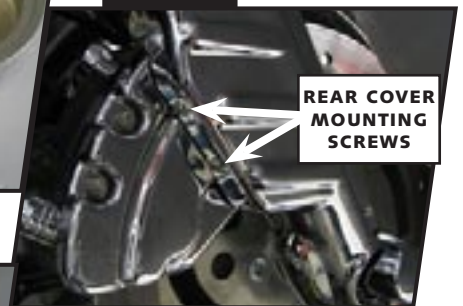


PIC.6

REAR COVER

FRONT COVER


10-24 X 3/8" BSCS SCREW

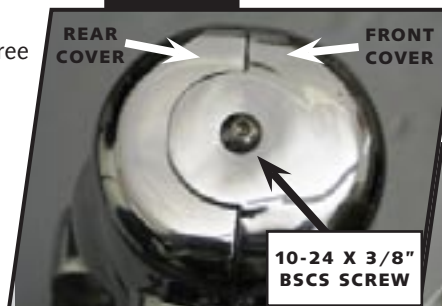

PIC.7

TOP OF TRIM PIECE FLAT

BOTTOM OF TRIM PIECE HAS A NOTCH

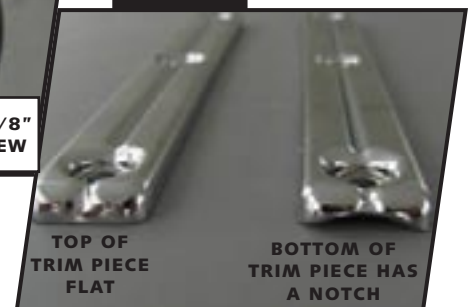

PAGE

2

Ride On!

LOWER LEG COVERS INSTALLATION