



COLOSSUS REAR TRIM

8666

FITS: '93-'09 ULTRA CLASSIC ELECTRA GLIDES AND '93-'96 ULTRA CLASSIC TOUR GLIDES

PARTS INCLUDED

- 1 Colossus Rear Trim Assembly
1 Hardware Kit
2 1/4" Flat Washers
1 Deco Filler Panel
6 Adhesive Strips
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Remove the antennas and test fit the Colossus assembly to the tour box - note the 3 adhesive mounting areas. Now is a good time to also test the Filler Panel included in the kit. The Filler Panel is two sided with a blackout plate (PIC 1) on one side and an eagle (PIC 2) on the reverse side. The Colossus can also be installed without the Filler Panel.

STEP 3 Once you have made a decision regarding the Filler Panel, remove the Colossus assembly. Clean the mounting area of the Filler Panel and the tour box. Using the adhesive strips included in the hardware kit, adhere the Filler Panel to the tour box.

STEP 4 Loosen the 3 screws (PIC 3) on each side (6 total) of the Colossus assembly. Do not remove the screws, only loosen so that the end pieces are able to move slightly.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer...

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
• The product must be properly installed, maintained and operated under normal conditions.
• Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
• Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
• Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
• Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



ATTENTION! The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

STEP 5 Clean the 3 mounting areas with the supplied alcohol pads. Rub the adhesive backing on the assembly to activate the adhesive.

ATTENTION! Ensure the area of installation is free of grease, oil, dirt or other debris to ensure proper adhesion. Küryakyn WILL NOT issue a warranty on any parts lost due to improper installation.

NOTE The mounting areas should be completely clean of any wax or polish residue. Failure to do so will result in poor adhesion.

STEP 6 Fit the Colossus assembly to the tour box. Be sure not to stick the adhesive until you are satisfied with the fit. Once the assembly is in place, press and hold the adhesive areas in place for one full minute. Full bonding strength will occur in 24 hours. Tighten the screws that were loosened in Step 4

STEP 7 Place the 1/4" Flat Washers over the antenna studs (PIC 4) with the polished side up. Replace the antennas removed in Step 2

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

Ride On!

Küryakyn[®]


PIC. 1



PIC. 2



PIC. 3

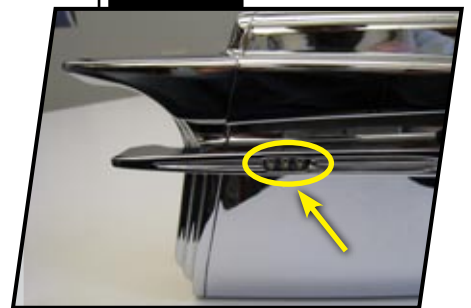

PIC. 4



PAGE

2