



INSTALLATION



CURVE TIP-BACK LICENSE PLATE FRAME 9198

FITS: BOLTS DIRECTLY TO FLAT OEM LICENSE PLATE MOUNT (HONDA VTX 1300 AND 1800, YAMAHA V-STAR AND ROAD STAR OR OTHER APPLICATIONS WITH A FLAT LICENSE PLATE BRACKET), UNIVERSAL MOUNT APPLICATIONS, OBTAINS CURVED LICENSE PLATE FRAME WITH 8-DEGREE ANGLE

PARTS INCLUDED

- 1 Curved License Frame
- 1 Curved Backing Plate
- 1 Hardware Kit, including:
 - 4 1/4-20 x 9/16 Flat Socket Cap Screw (FSCS)
 - 4 1/4-20 x 1 Button Socket Cap Screw (BSCS)
 - 8 1/4 Flat Washer
 - 4 1/4-20 Nylon Insert Locknut
 - 1 Adhesive Pad
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

ATTENTION! It is the installer's responsibility to ensure all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

NOTE Due to the varying sizes of license plates, modification of the plate may be necessary to fit.

NOTE Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

TOOLS SUGGESTED

Set of hex wrenches, combination wrenches or socket set and ratchet


PROCEDURE

STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition.

STEP 2 Remove your license plate; set it aside, it will be re-used.

STEP 3 Determine the mounting location and orientation of the new license plate mount.

STEP 4 Use any combination of the slots shown in PIC.1 to mount the license plate frame to the motorcycle.

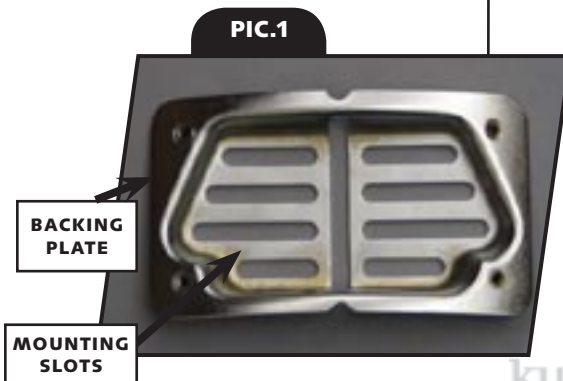

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



NOTE Use the included adhesive pad for padding on custom applications.

STEP 5 Secure the frame to the mounting location with the included 1/4-20 x 1 BSCS, 1/4 Flat Washers and 1/4-20 Nylon Insert Locknuts. See [FIG.1](#)


STEP 6 Hold your license plate on the backing plate and place the Curved Frame over it; secure the frame with the four 1/4-20 x 9/16 FSCS. See [PIC.2](#).

NOTE [PIC.2](#) displays mounting position on a long fender model.

NOTE [PIC.3](#) displays mounting position on a short fender model.

STEP 7 Ensure proper clearance and operation before riding the motorcycle.

FIG.1

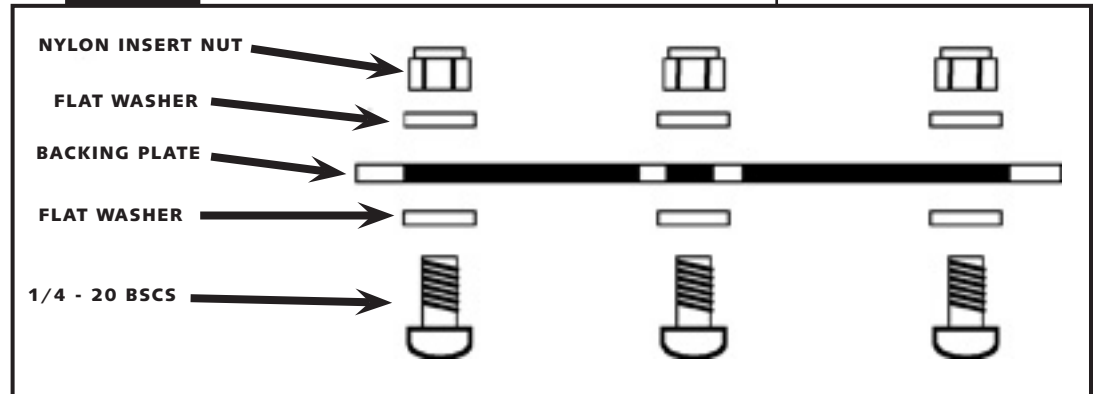

Ride On!

PIC.2



PIC.3



PAGE

2