



# INSTALLATION

## DRIVING LIGHT BAR MOUNTING BRACKET 4003

FITS: HONDA 750 ACE, 1100 SABRE, 1100 AERO

PART#	INCLUDED
404003	1 Light Bar Mounting Plate, Stainless Steel
904003	1 Light Bar Mounting Kit Includes:
201130	2 .25" I.D. X .74" O.D. X .050" Thick Flat Washer
201131	1 .265" I.D. X .390" O.D. X .500" Long Polished Stainless Steel Spacer
304003	1 Installation Instructions

### TOOLS SUGGESTED

Set of Standard and Metric Combination Wrenches and a Set of Standard and Metric Allen Wrenches and a Factory Service Manual for Wiring Reference.

### NOTE

We recommend using Kuryakyn Part No. 2328, Universal Wiring and Relay Kit (sold separately) to manually operate the running lights. It is important to use Loctite on all hardware when installing new parts.

### PROCEDURE

**STEP 1** Remove the two screws that hold the O.E.M. turn signal bar on the triple tree and remove the turn signal bar.

**STEP 2** Remove the two screws on the headlight bezel. Carefully remove the bezel and bulb.

**STEP 3** Unplug the O.E.M. turn signal wires that go to the turn signal bar and set them aside.

**STEP 4** Position the mount and light bar mounting plate in place of the O.E.M. turn signal bar.

**STEP 5** Position the new light bar on to the mounting plate and fasten using the two 1/4"-20 X .40" Button Head Cap Screws supplied with the light bar.

**STEP 6** Route the wires under the mounting plate and up into the rear of the headlight.

**STEP 7** Connect the turn signal wires to the corresponding O.E.M. wires inside of the headlight. (Refer to Factory Service Manual.) We recommend connecting both of the power leads from the driving lights to Kuryakyn Part No. 2328 Universal Wiring and Relay kit or an equal quality relay switch.

### WIRING COLOR CODES AND INFORMATION

#### L.E.D. Auxiliary Running Lights and Turn Signals

COLOR	FUNCTION
Red	"Low" running light
White	"High" turn signal
Black	Ground

#### Silver Bullet Driving Lights

These halogen lights are grounded by their connection to the chassis. The single black wire from each light is the power wire.

**STEP 8** Test for function of ALL the lights before re-assembling the headlight and bezel. Reassemble the headlight when all lights are functioning properly.

### E-MAIL

techsupport@kuryakyn.com  
or Call 715.247.2983

### WARRANTY

Kuryakyn™ warrants that any Kuryakyn product sold hereunder, if properly installed, maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of one (1) year from the date the Kuryakyn products are sold to the customer.


CONSEQUENTIAL DAMAGES:  
Kuryakyn shall not be liable for any consequential or incidental damages.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2003 Kuryakyn USA™ All Rights reserved.

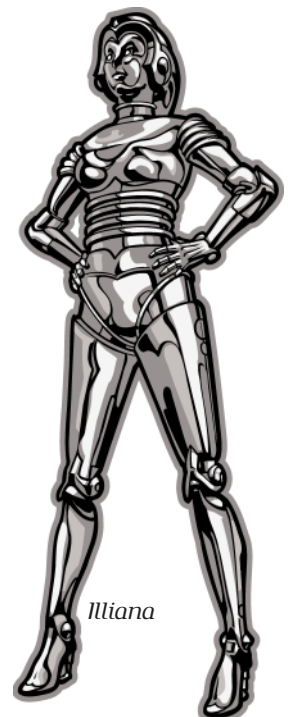

Illiana