

INSTALLATION

TAPPET ACCENT COVER FOR XL

7782

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- •Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breech of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- •Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- •Küryakyn makes no warranty of any kind in regard to other manufacturer¹s products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.

PARTS INCLUDED

- 1 Tappet Accent for Sportster
- 1 Tappet Bracket
- 1 1/4" Lock Washer
- 1 1/4-20 X 3/8" Socket Head Cap Screw
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING

THE CONTENTS DESCRIBED HEREIN CAN RESULT IN

POTENTIAL DEATH OR SERIOUS INJURY

ATTENTION!

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and

functionality.

TOOLS SUGGESTED

Set of Hex wrenches, Set of Hex Socket Wrenches and Ratchet, Torque Wrench

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the

installation. Park the motorcycle on a hard, level surface and turn off the

ignition. Let cool.

WARNING! YOU WILL BE WORKING AROUND THE ENGINE AND

EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY

COOLED TO PREVENT INJURY.

ATTENTION! A factory service manual may be helpful in performing this installation.

Do not attempt to perform this installation if you are not confident in your ability to complete all of the steps in the procedure; consult a

trained technician.

-cont.-

kuryakyn.com

Küryakyn

STEP 2 Remove the two inside socket head cap screws from the tappet blocks.

These have Loctite on them from the factory, so they will not move easily.

Set aside, they will be reused. PIC 1

STEP 3 Install the included bracket to the cover using the supplied 1/4-20 X 3/8" Socket Head Cap Screw. The tab on the cover will fit into the slot on the bracket. PIC 2

PIC 1


REMOVE THESE TWO BOLTS

STEP 4 Install the bracket and cover assembly to the tappet blocks with the socket head cap screws removed in Step 2. Tighten to the factory torque spec. PIC 3

PIC 2 1/4-20 SOCKET HEAD CAP SCREW AND WASHER GO HERE TAB ON COVER FITS IN SLOT HERE ON BRACKET

ATTENTION!

It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

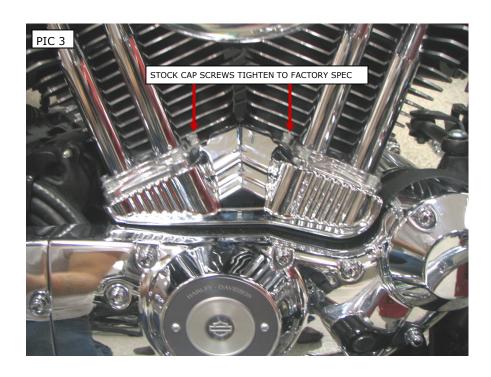

Ride On!

PAGE

2